


HT60-166M

NEW


Big Size: Cell 166*83

360W / 365W
370W / 375W / 380W

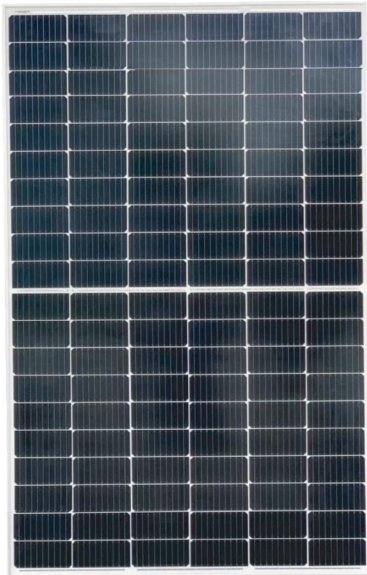

- Module Efficiency: 19.3%
- No. of Cells: 120 (6 × 20)
- Weight: 20.5kg
- Dimensions: 1775mm×1052mm×35mm

(Optional)
Design of Water
Leakage Trough
Monocrystalline

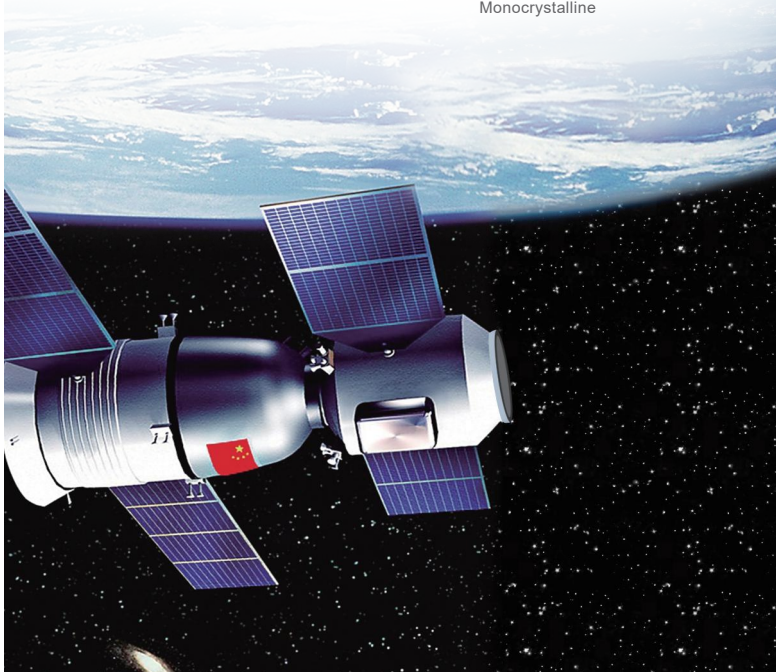

Shanghai Aerospace Automobile
Electromechanical Co., Ltd.
website: www.ht-saae.com



Factory :
Liányungang ShenZhou New Energy Co., Ltd.
Turkey HT Solar Energy Joint Stock Company



Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



9BB The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption

10Ys

Products Warranty



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs

25Ys

Warranty on power output



EL
Microcrack resistant Double glass structure enhance reliability, triple EL tested of high quality control.

All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

5W

Positive tolerance 0/+5w guaranteed



Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)

PID


PID Resistant

Comprehensive and first-rate certification system

IEC61215: 2016. IEC61730: 2016 Latest Standard
ISO9001, ISO14001 and OHSAS18001,
meeting the highest international standards
Strict quality control





IEC 61215
IEC 61730
Regular Production
Surveillance
www.tuv.com



360W/365W/370W/375W/380W

Engineering Drawing

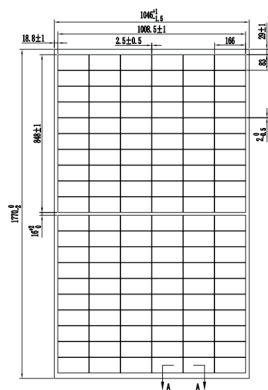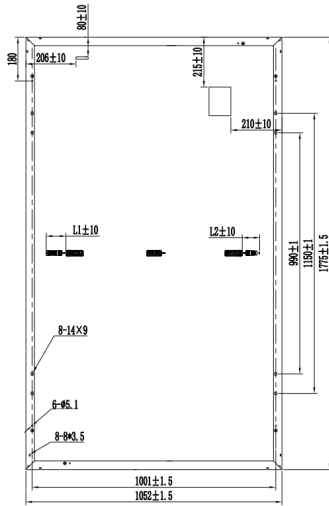

Electrical Characteristics

Module	HT60-166M				
Maximum Power at STC(Pmax)	360	365	370	375	380
Open-Circuit Voltage(Voc)	41.1	41.3	41.5	41.6	41.7
Short-Circuit Current(Isc)	11.53	11.63	11.72	11.85	11.98
Optimum Operating Voltage (Vmp)	33.7	33.9	34.1	34.2	34.3
Optimum Operating Current(Imp)	10.69	10.77	10.86	10.98	11.09
Module Efficiency	19.3%	19.5%	19.8%	20.1%	20.3%
Power Tolerance	0 ~ +5W				
Maximum System Voltage	1000V / 1500V DC(IEC)				
Maximum Series Fuse Rating	15A				
Operating Temperature	-40 °C to +85 °C				

*STC: Irradiance 1000W/m², module temperature 25, AM=1.5
Optional black frame or white frame module according to customer requirements

NMOT

Module	HT60-166M				
Maximum Power	267	270	274	278	281
Open Circuit Voltage (Voc)	38.8	39.0	39.2	39.3	39.4
Short Circuit Current (Isc)	9.31	9.39	9.46	9.57	9.67
Maximum Power Voltage (Vmp)	31.8	32.0	32.2	32.3	32.4
Maximum Circuit Current (Imp)	8.40	8.44	8.51	8.61	8.67
NOCT	45°C ±2°C				

*NMOT: Irradiance 800W/m², ambient temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics


Solar Cells	Monocrystalline 166 × 83 mm
No. of Cells	120 (6 × 20)
Dimensions	1775mm×1052mm×35mm
Weight	20.5 kg
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68
Cable	4mm ² (IEC) Length:900mm
Connectors	MC4 / MC4 Compatible
Packaging Configuration	30pcs / box, 780pcs / 40'HQ Container

Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.39%/K
Temperature Coefficient of Voc	β (Voc)	-0.29%/K
Temperature Coefficient of Isc	α (Isc)	0.049%/K


I-V Curves

Current-Voltage & Power-Voltage Curve

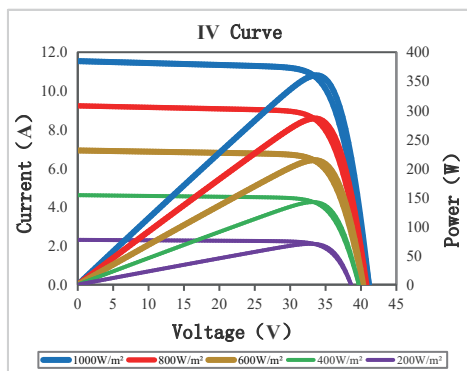

Warranty

10-year product warranty
25-year warranty on power output
Specific information is referred to the product quality guarantee



Information Box